

HISAKAGE[®]

Refrigerator

V Series—304 Air Cooling Refrigerator

Model : ☐ SRVP-140 ☐ SFVP-140 ☐ CT-SVP-140



SRVP-140/SFVP-140/CT-SVP-140

Specification

- Model : SRVP-140 / SFVP-140 / CT-SVP-140
- Capacity: 1150L / 1050L
- Temp: -6~15°C / -22~-18°C / 0~15— -22~-18°C
- Cooling Mode: Air cooling
- Refrigerant: R290
- Shelf Layer: 6
- Insulation Material: Cyclopentane
- Sheet Metal: 304SS
- Voltage: 220V
- Power: 520W / 780W / 850W
- Size: 1400*800*(1900+100)

Product Features

- 1) Computer board intelligent control, fault diagnosis function. Temperature accurate to 0.1 degrees, temperature difference in the box does not exceed 2 degrees,
- 2) Stainless steel door handle, beautiful, strong, durable, can be better matched with customers products.
- 3) The foam layer thickness of the box is ≥ 60 , the foam thickness of the door panel is ≥ 55 , the door panel is flush with the ventilation window, the door automatic return to ensure food safety when the angle is $\geq 45^\circ$
- 4) Environmentally friendly refrigerant R290, avoid air pollution, cyclopentane fluorine-free environmental protection, 60mm thick high-density foam insulation layer, better insulation performance.
- 5) The heating wire is hidden in the door frame to avoid condensation, the circular arc design in the box is helpful for daily maintenance, and no dead corners are left
- 6) Adapt to the high temperature 43°C environment design, can meet most customer needs



Brand Compressor

R290 refrigerant, efficient, energy saving, better cooling effect.



Intellectual Temperature Control

Precise temperature control automatic detection & alarm




Web: www.hisakage.com



HISAKAGE[®]

Refrigerator

V Series—304 Air Cooling Refrigerator

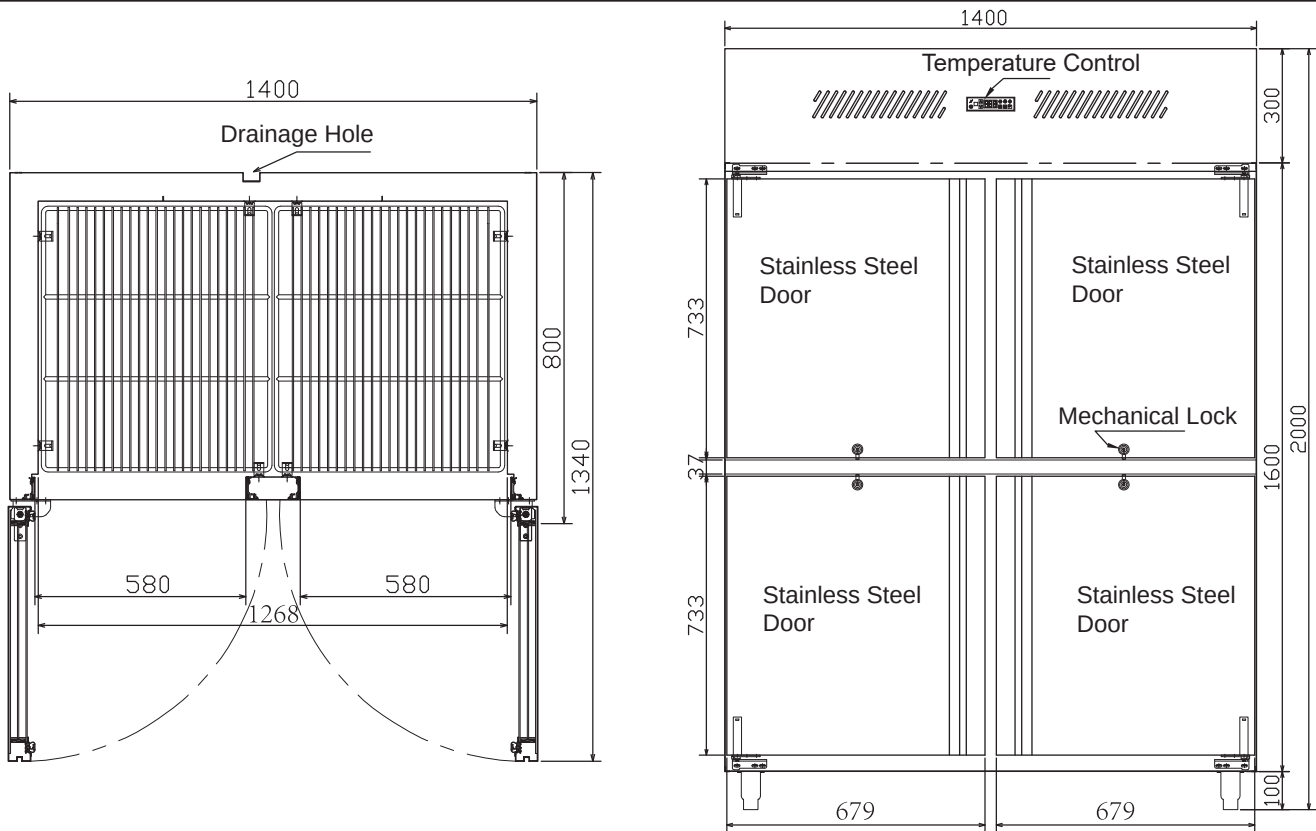

Width 1400mm

Depth 800mm

Height 2000mm

1900mm Height excludes wheels

2000mm Height includes wheels

Specifications

	Model	Function	Capacity	Temp	Cooling Type	Refrigerant	Shelf	Power	Size
Air Cooled	SRVP-140	R	1150	-6~15	A	R290	6	520W	1400x800x (1900+100)
	SFVP-140	F	1150	-22~-18	A	R290	6	780W	1400x800x (1900+100)
	CT-SVP-140	R/F	1050	0~15 /-22~-18	A	R290	6	850W	1400x800x (1900+100)

Web: www.hisakage.com