

Model : ☐ DCL-120



DCL-120

Specification

- Model : DCL-120
- Capacity: 2 / 3 layer
- Temp: 2~15°C
- Cooling Mode: Air cooling
- Refrigerant: R290
- Insulation Material: Cyclopentane
- Sheet Metal: 304SS
- Voltage: 220V
- Power: 850W
- Size: 1200*750*1250

Product Features

- 1) Double-layer heated ultra-white tempered explosion-proof anti-fog glass is adopted, the visibility reaches 92%.
- 2) Computer board intelligent control, refrigeration temperature range: +2~+15°C can be adjusted according to actual needs.
- 3) The appearance can be customized according to customer requirements, stainless steel material, marble material, the cabinet can be seen as food-grade mirror stainless steel.
- 4) Adapt to the high temperature 43°C environment design, the bottom has a universal movable wheel, easy to move, can meet most customer needs.
- 5) Environmentally friendly refrigerant R290, avoid air pollution, cyclopentane fluorine-free environmental protection, 60mm thick high-density foam insulation layer, better insulation performance.
- 6) Integrated silent design unit, compressor (Huayi/Secop), condenser (thickened copper tube), fan (Germany EBM) the whole machine can be pulled out , easy to maintain the rear door adopts double hollow insulation transparent glass, the surrounding track uses narrow aluminum alloy profiles, beautiful and durable, easy to push and pull.



Brand Compressor

R290 refrigerant, efficient, energy saving, better cooling effect.



Intellectual Temperature Control


Precise temperature control automatic detection & alarm effect.



HISAKAGE[®]

Refrigerator

DCL Series— Rectangular Showcase

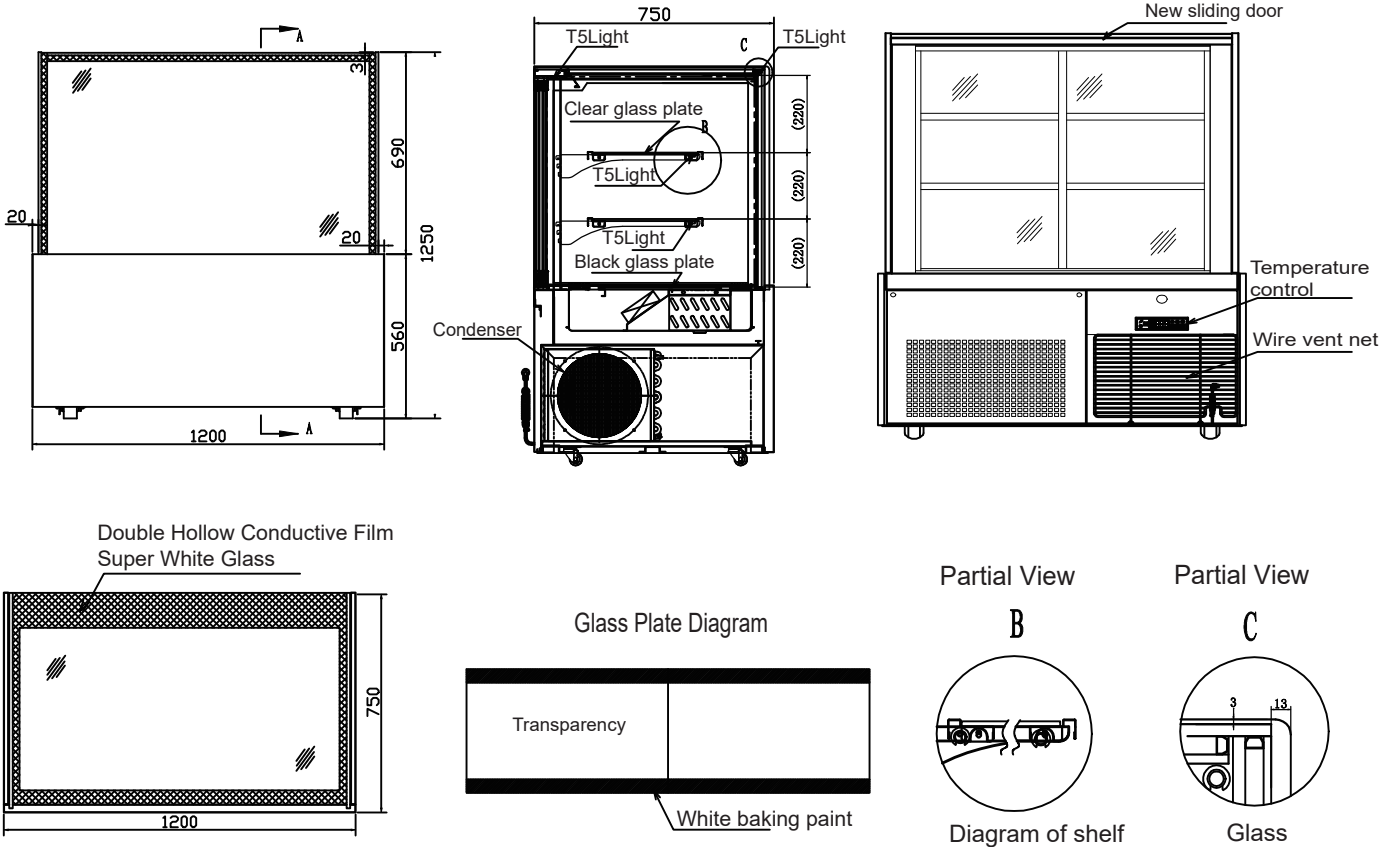

Width 1200mm

Depth 750mm

Height 1250mm

1250mm Height includes 65mm wheel

Specifications

	Model	Function	Capacity	Temp	Cooling Type	Refrigerant	Shelf	Power	Size
Air Cooled	DCL-120	R	2/3Layer	2~15	A	R290	2	850W	1200x750x1250

Web: www.hisakage.com