HISAKAGE®

Ice Maker

AS Series Self-Contained Ice Maker

Model：□ AS-200



AS-200

Electric Specification

·Rated Voltage：220V / 50Hz

·Rated Current：2A

·Rated Power：460W

·Fuse Rating：10A

Operating Specification

·BTU Per Hour：2000(Average)/2500(Peak)

·Ambient Temperature Range：1.7˚C-43.3˚C

·Water Temperature Range：3.2˚C-32.2˚C

·Potable Water Pressure：138KPA-550KPA

·Refrigerant： R290

Product Features

1) Rotary extrusion ice making. Evaporation temperature -15℃, ice center temperature -7℃.

2) **Flake** ice is soft,and it has a slightly higher water content than cube ice.

3) It can still work normally at peak air 43℃.

4) Incorporate R290 refrigerant ,which is more efficient and environmentally friendly, lower global warming.

5) Intelligent controller,auto ice making , ice release and cleaning , trouble alarm.

6) Adopt SS304 and ABS for ice machine. ice bin designed with interior rounded corners for easy cleaning with PE injection molding process makes smooth and beautiful surface , strong and durable.

7) Easy cleaning , Pour the cleaning liquid into the water trough. The cleaning process takes about 35 minutes .

8) Easy for repair and service. Removable air filter,water-trough,distribution tube for fast and efficient cleaning,lower labor cost.

9) The main components (First well-known international brands). Unique evaporator design with more efficient and energy-saving.

10) Perfect for hotels, coffee shops,convenience stores, club house,Japanese restaurants etc.







F：Flake
Weight：1g
Water content：10%
Dimension：5*8 mm

www.hisakage.com

HISAKAGE®

Ice Maker

AS Series Self-Contained Ice Maker

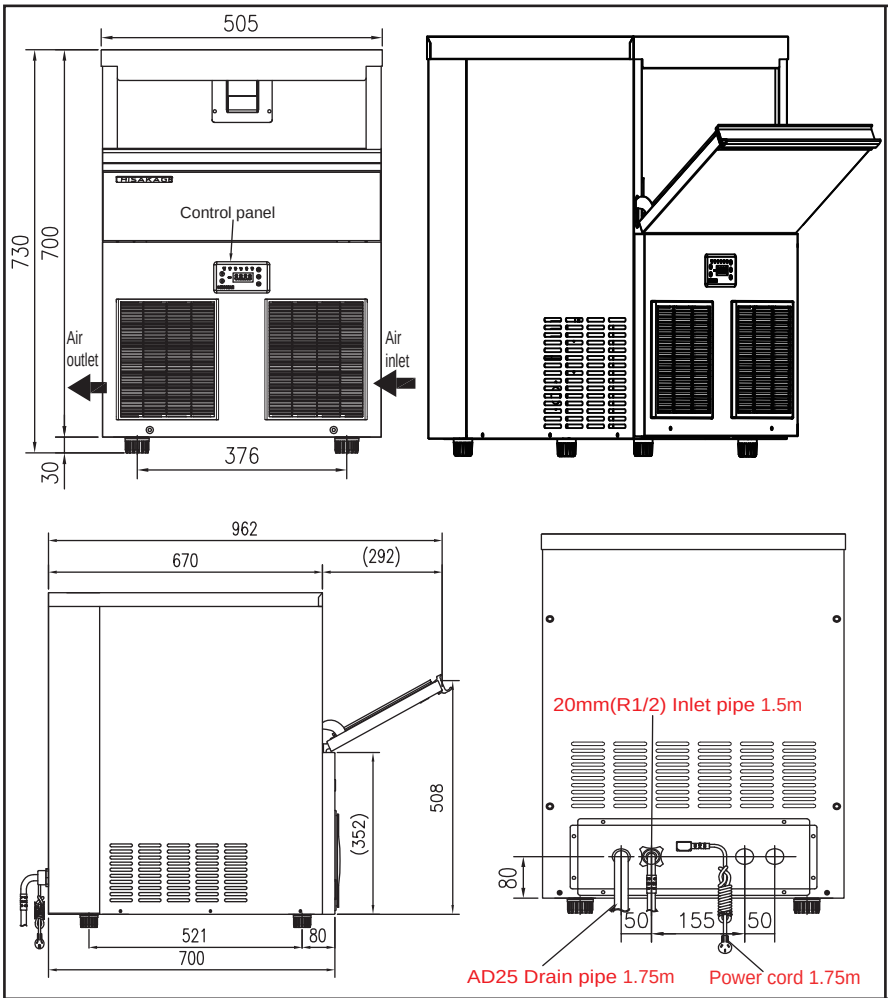



Width	500mm
Depth	670mm
Height	795mm/825mm
Storage Bin	33lbs. 15kg.

795mmHeight excludes bin legs
825mmHeight includes bin legs

Specifications

	Model	Ice Type	Ice Prpduction 24 Hours (Air/Water)		Power Usage (KWh/100lbs)	Potable Water (Usage/100lbs)
			21˚C Air/10˚C Water	32˚C Air/21˚C Water		
Air Cooled	AS-200	Flake	215 lbs.	167 lbs.	5.3	46L
			98 kg	76 kg		